


Raccordo tipo VR B

Coupling type VR B

Code: VRB(diam.)(mat.)(fil.)

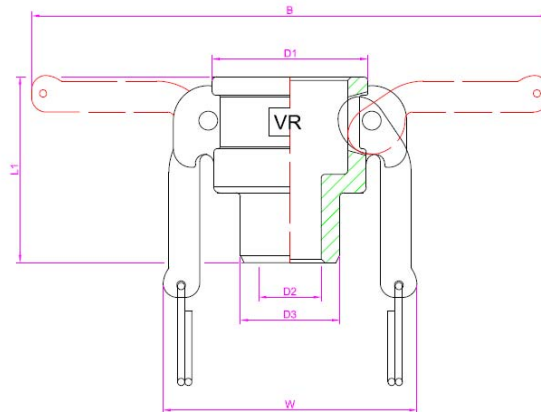

Raccordo Rapido FEMMINA filettato Maschio
Coupling female threaded Male

Filettatura/Thread : BSPP – BSPT – NPT

pollici/inch.	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"	5"	6"
diam.	50	75	100	125	150	200	250	300	400	500	600
L1	47,4	51,2	61,8	66,8	70,1	77,5	80,8	90,8	94,7	94,6	105,6
L2	15,2	18,8	25,5	23,8	24,7	25,4	28,9	32	34,4	36,3	38,2
D1	42,5	41,5	47	57,2	64,1	74,2	90,9	107,3	133,8	163,5	193,1
D2	13,2	19	24,8	32,1	37,9	48,4	63	75,5	100,8	126,4	149,6
D3	20,1	25,5	32,8	40,9	46,9	58,8	74,1	86,8	111,6	137,1	163,7
B	110	111	124	183	189	199	205	247	275	300	385
W	58	56	65	90	95	105	108	135	170	185	235

Temperature Temperature	- 40°C / 240°C											
Dimensioni Dimentions	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"	5"	6"	8"
Pressioni barg Pressure barg	40	40	40	40	40	40	16	16	16	8	8	6

Materiali Materials

AISI 316 / ASTM A 351 CF8M / EN 14408/1
AISI 304 / ASTM A 276-986 / EN 1.4301
OTTONE / Brass
POLIPROPILENE / Moplen
ALLUMINIO / Alluminium
Acciaio al carbonio

Altri materiali fornibili su richiesta.
Other materials on requests

According to: U.S. MIL-C-27487/ DIN 2828 / UNI EN 14420